

VIBCO

VIBRATORS

GIO Turbine Line

of Silent Plastic Turbine Pneumatic Vibrators


Models: GIO-100, GIO-130, GIO-160, GIO-190



Model	Weight***		60 PSI		80 PSI				Max. Lbs**	
	lbs.	kg.	Speed VPM	CFM	Speed VPM	CFM	Force lbs.	Force N		dB*
GIO-100	3 oz	0.085	12000	3.5			20	89	66	200
GIO-130	7 oz	0.198	8000	4.5	10500	5.5	75	334	67	750
GIO-160	10 oz	0.283	5500	5	9000	7	160	712	67	1600
GIO-190	13 oz	0.368	8500	5	10000	7	250	1112	70	2500

GIO Silent Pneumatic Turbine Vibrators are the smallest, lightest, most versatile VIBCO turbine vibrators available. Your wash-down environment is no match for the durable, corrosion-resistant housing that has excellent resistance to solvents.

Like all VIBCO Pneumatic Turbine Vibrators, the GIO line is virtually silent and never requires lubrication. You'll start saving time, money and trouble from the moment you install a VIBCO GIO vibrator.

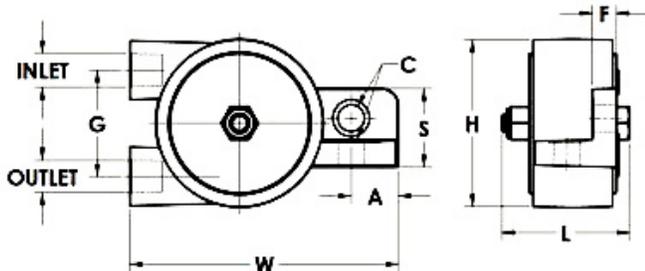

- Small size and low cost makes VIBCO GIO vibrators a perfect solution for those annoying trouble spots in your production line
- VIBCO Vibrators EXCLUSIVE durable, light-weight plastic housing for long life and corrosion resistance
- Single-bolt mount for maximum flexibility

Model	A		C**		L		W		H		D		E		G		I*
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	Air Inlet
GIO-100	2 5/8	67	5/16	8	3 1/4	83	1 5/8	41	2	51	1	25	5/16	8	9/16	14	1/8-NPT
GIO-130	3 3/16	81	3/8	10	3 3/4	95	1 7/8	48	2 1/4	57	1 3/16	30	5/16	8	5/8	16	1/4-NPT
GIO-160 & 190	3 9/16	90	3/8	10	4 1/8	105	2	51	2 9/16	65	1 1/4	32	5/16	8	3/4	19	1/4-NPT

* NPT Pipe Tap Size

** Bolt Size

800.633.0032 • www.VIBCO.com

VIBCO GIO SILENT TURBINE VIBRATORS